

TEHNNICAL DATA SHEET

PETG PREMIUM

Date of issue: 29.06.2022

Date of update: 02.07.2023

Product description:

PETG PREMIUM polymer is a low-odor, styrene-free material uniquely suited for 3D printing enthusiasts, particularly those who need the flexibility to print within a wide processing temperature range. He has good flow properties through the printer nozzle, even at lower temperatures than some other polymers require.

Storage:


Store in dry area, in a closed container away from moisture.

Use desiccant bags to prevent moisture absorption, as PETG is slightly hygroscopic.

PRODUCT PARAMETERS

Parameter	Value
Filament diameter [mm]	1.75
Diameter tolerance [mm]	+/- 0,01
Oval tolerance [mm]	+/- 0,01

Spool dimensions [mm] (ø / height / hole ø)	200/57/52
Spool weight [g]	204
Spool material	Transparent SAN
Weight with packaging [g]	1 550
Net weight [g]	1 000
Box dimensions [mm]	203/207/70

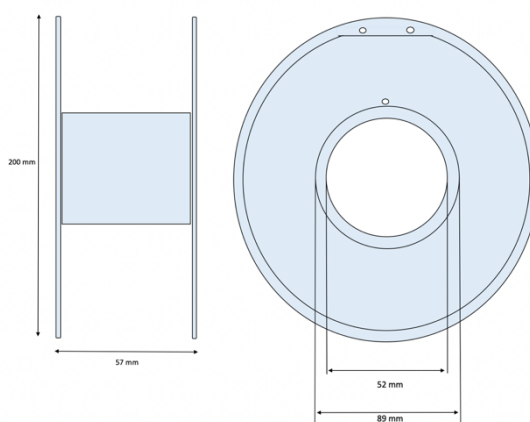

RECOMMENDED PRINTING PARAMETERS

Parameter	Value
Print temperature [°C]	210-240
Bed temperature [°C]	60
Cooling [%]	0-100
Closed chamber	Not required, but may improve print
Chamber temperature [°C]	30-60
Printing Speed [mm/s]	30-100
Nozzle type	-

PHYSICAL PARAMETERS OF THE MATERIAL

Parameter	Value	Unit	Test method
Density	1,20	g/cc	ISO 1183
Melt flow rate	10-30	g/10min	ISO 1133 220°C/10Kg
Vicat softening temp.	70-80	°C	ISO 306 VST/A/50 (50°C/h,10N)
Tensile modulus	1800	MPa	ISO 527 1mm/min
Tensile strength	67	MPa	ISO 527 @Yield 50mm/min (2inch/min)
Elongation at break	193	%	ISO 527 @Break 50 mm/min (2inch/min)
Impact strength	NB	J/m2	ISO 179 Charpy Notched @23°C (73°F)

The values above have been measured using standard test specimens made of non-colored material at room temperature. The figures should be considered as indicative values only. Actual properties of PETG PREMIUM parts can be affected by the printing parameters, design of the model, ambient conditions, application of the printout etc. It is essential that users test our products to determine whether they are suitable for their intended use.